


# SELF-CONTAINED SMOKE DETECTOR GS506



## SPECIFICATION

Power Source	DC 9V Alkaline battery
Operation Current	Standby $\leq 10 \mu\text{A}$
	Alarm $\leq 30 \text{ mA}$
Alarm Sensitivity	0.1 - 0.19 dB/m
Alarm Volume	> 85 dB(A) @ 3 meters
Low Battery Warning	DC 6.5 - 7.8 V

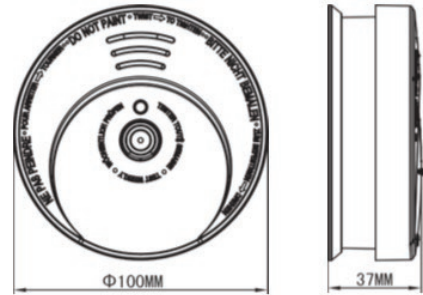

±

## FEATURE

- Photoelectric chamber for early detection from all directions
- Flash alarm indicator (red LED)
- Test button for easy recommended monthly testing
- Low battery signal
- Safety clip feature, not allow mounting without battery installed
- Ceiling mounting
- Easy to install with mounting bracket
- 10 years lifetime of product
- Manufactured and tested in accordance with BS EN 14604:2005